



COOLMAXXTM COMPACT

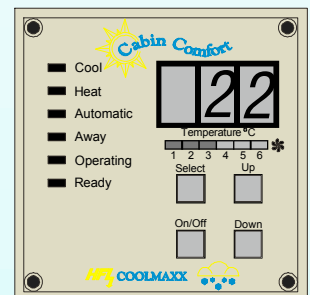

SELF CONTAINED MARINE AIR CONDITIONERS 24,000 BTU 7,000 WATTS
KOMPAKT MARINE KLIMA ANLAGE 24,000 BTU 7,000 WATTS


- * Green Gas R407C
- * Rotary Compressor
- * Sealed Refrigerant Circuit
- * Cooling Via. Seawater Pump
- * Mechanical Or Digital Control Panel
- * Horizontal Or Vertical Air Outlet
- * Easy Electrical Installation
- * Robust Construction In G.R.P.
- * Low Noise, Low Vibration
- * Seawater Resistant Material
- * Extremely Compact Design
- * Compressor Noise Cover
- * Cupro - Nickel Condenser
- * High and Low Pressure Protected
- * GRÜNES GAS R407C
- * DREHKOLBEN KOMPRESSOR
- * HERMETISCH GESCHLOSSENES KÜHLSYSTEM
- * KÜHLUNG ÜBER SEEWASSER PUMPE
- * MECHANISCHES ODER DIGITALES PANEL
- * LUFTAUSLASS VERTICAL ODER HORIZONTAL
- * EINFACHE ELEKTRISCHE VERKABELUNG
- * ROBUSTE BAUWEISE IN G.F.K.
- * GERÄUSCH UND SCHWINGUNGSARM
- * SEEWASSERFESTES MATERIAL
- * EXTREM KLEINE BAUWEISE
- * KOMPRESSOR GERÄUSCH KAPSEL
- * KUPFER NICKEL KONDENSATOR
- * HOCH-UND NIEDERDRUCK ÜBERWACHT

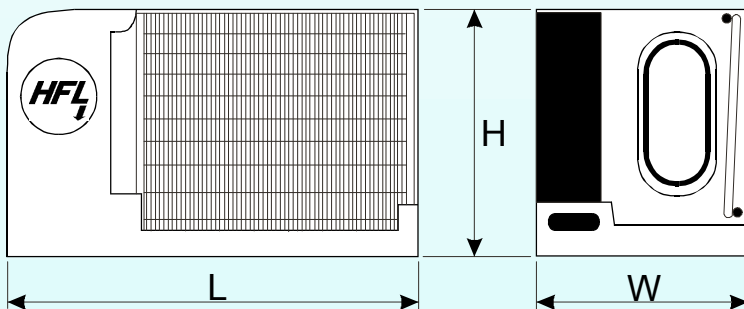

SPECIFICATION


SPEZIFIKATION

MODEL CMC 70 KHZ			MODELL CMC 70 KHZ		
Capacity	(Watt)	7000	Leistung	(Watt)	7000
Capacity	(BTU)	24000	Leistung	(BTU)	24000
Voltage	(V)	230	Spannung	(V)	230
Current	(A)	6.5	Strom	(A)	6.5
Length (L)	(Inches)	26 ¼	Länge (L)	(MM)	670
Width (W)	(Inches)	14 ½	Breite (W)	(MM)	365
Height (H)	(Inches)	15	Höhe (H)	(MM)	380
Starting Current	(A)	3 x FL	Anlaufstrom	(A)	3 x FL
Weight	(Lbs)	77	Gewicht	(Kg)	35
Ducting Diameter(Inches)		7" Oval	Luftschlauch Ø	(MM)	175 Oval
Seawater Pump		P510CZ	Seewasser Pumpe		P510CZ

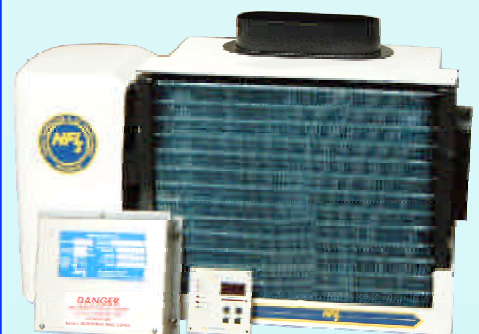

COOLMAXXTM COMPACT

TYPICAL INSTALLATION TYPISCHER EINBAU

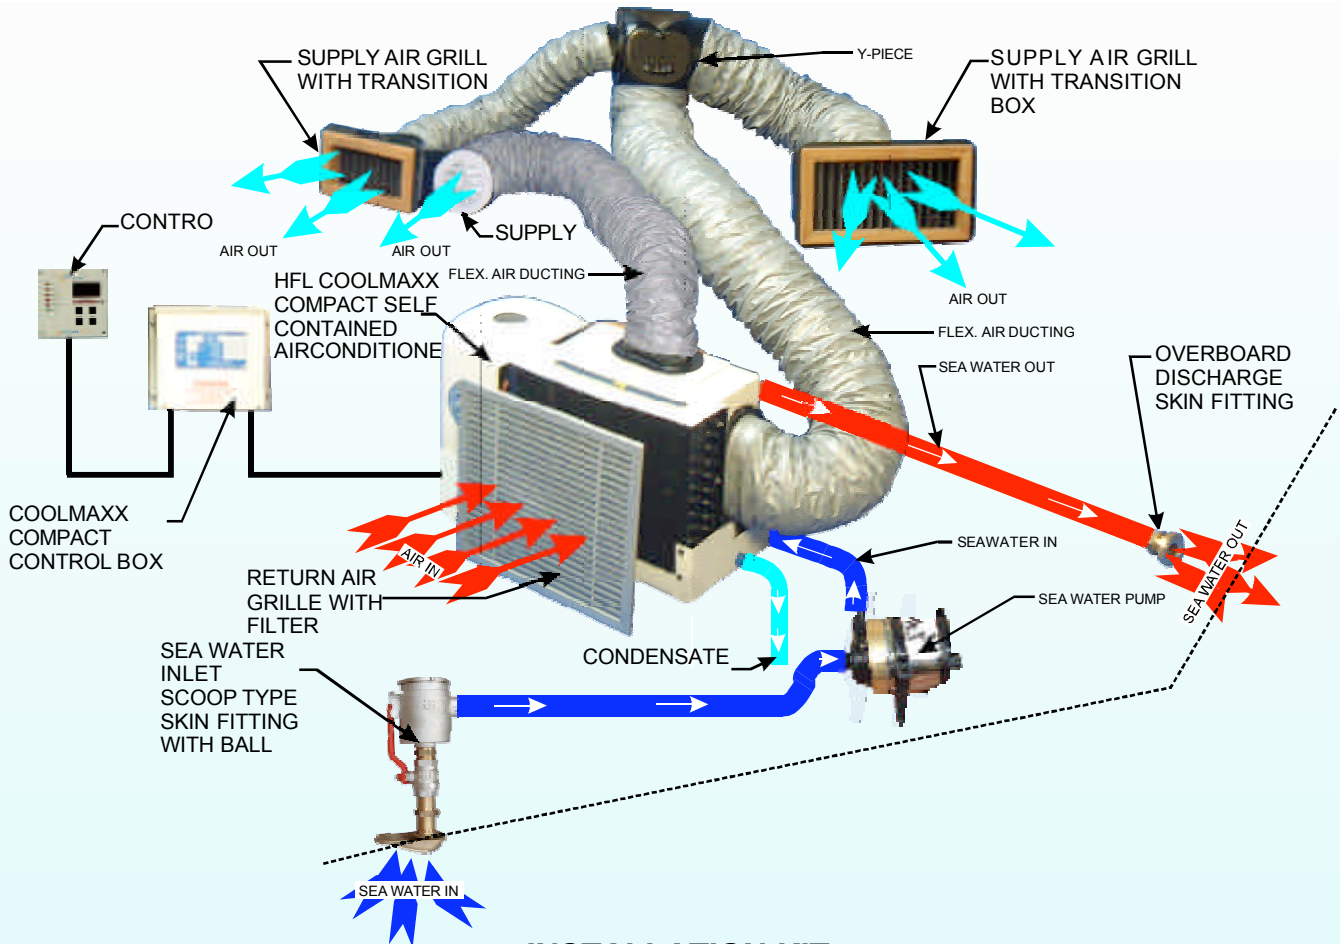

INSTALLATION KIT

3m Seawater Hose, Outlet Skinfitting, Seawater Inlet Kit with strainer, scoop and ballvalve, 3m Insulated Flexible Air Ducting, Supply and Return Air Grilles.

EINBAUZUBEHÖR SATZ


3m S/W Schlauch, S/W Auslass, S/W Einlasskit mit S/W Filter, Scoop und Absperr Ventil, 3m isolierter Luftschlauch, Luft Einlass- und Austrittsgitter.



24000 BTU 7000 Watts



2-Knob Control Panel

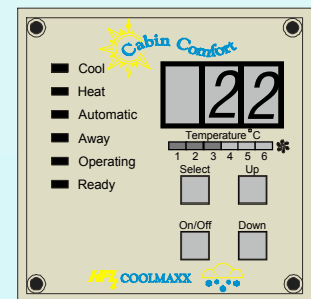

Digital Control Panel



UK
HFL INDUSTRIAL & MARINE POWER LTD.
HFL HOUSE, LOCKFIELD AVE. ENFIELD MIDDLESEX. EN3 7PX, U.K.
TEL: +44 (0)20 8805-9088
FAX: +44 (0)20 8805-9534

EUROPE
HFL POWER & AIR GMBH
HEISKAMPSTRASSE 8
D-45527 HATTINGEN. GERMANY.
TEL: +49 2324 682686 / 682687
FAX: +49 2324 682688
e-mail: horst@hflgen.com

MIDDLE EAST
HFL MANTECH LTD.
PO BOX 20695, DUBAI
UNITED ARAB
EMIRATES
TEL: +971 433 25 42
FAX: +971 433 06 49

WWW.hflgen.COM

